
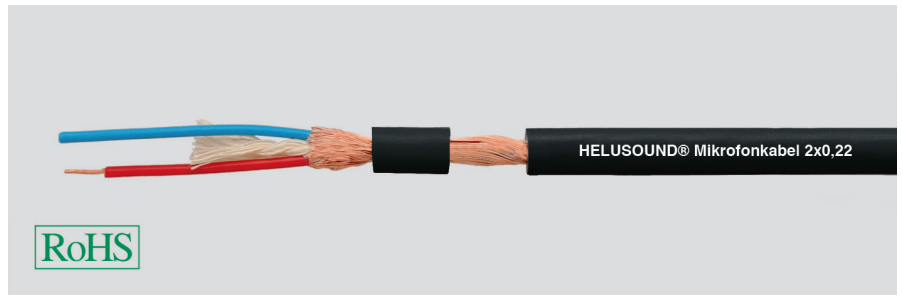


Audio

Microphone cables with spiral screen, paired

HELUSOUND[®]



Type

Cable structure

Conductor material:
Core insulation:
Core colours:
Stranding element:
Sheath material:
Cable external diameter:
Sheath colour:

Microphone cable

2x0,22

Copper, bare
PE
rd, bu
2 cores with textile filler stranded
PVC
approx. 6,0 mm
black

Microphone cable

2x0,15

Copper, bare
PVC
rd, wh
pairs stranded
PVC
approx. 4,2 mm
black

Electrical data

Conductor resistance, max.:
Insulation resistance, min.:

86 Ohm/km
1 GOhm x km

120 Ohm/km
1 GOhm x km

Technical data

Weight:
Min. bending radius for laying:
Operating temperature range min.:
Operating temperature range max.:
Copper weight:

approx. 55 kg/km
60 mm
-25°C
+70°C
12,1 kg/km

approx. 27 kg/km
42 mm
-25°C
+70°C
14,0 kg/km

Part no.

400038

400039

Dimensions and specifications may be changed without prior notice.

Application

The 2-core HELUSOUND[®] microphone cable with spiral screen is suitable for use in professional stage and studio operation. The microphone cable 2x0.15 has a double spiral screen made of bare copper wires.